



High-Speed Multistage Canned Motor Pump

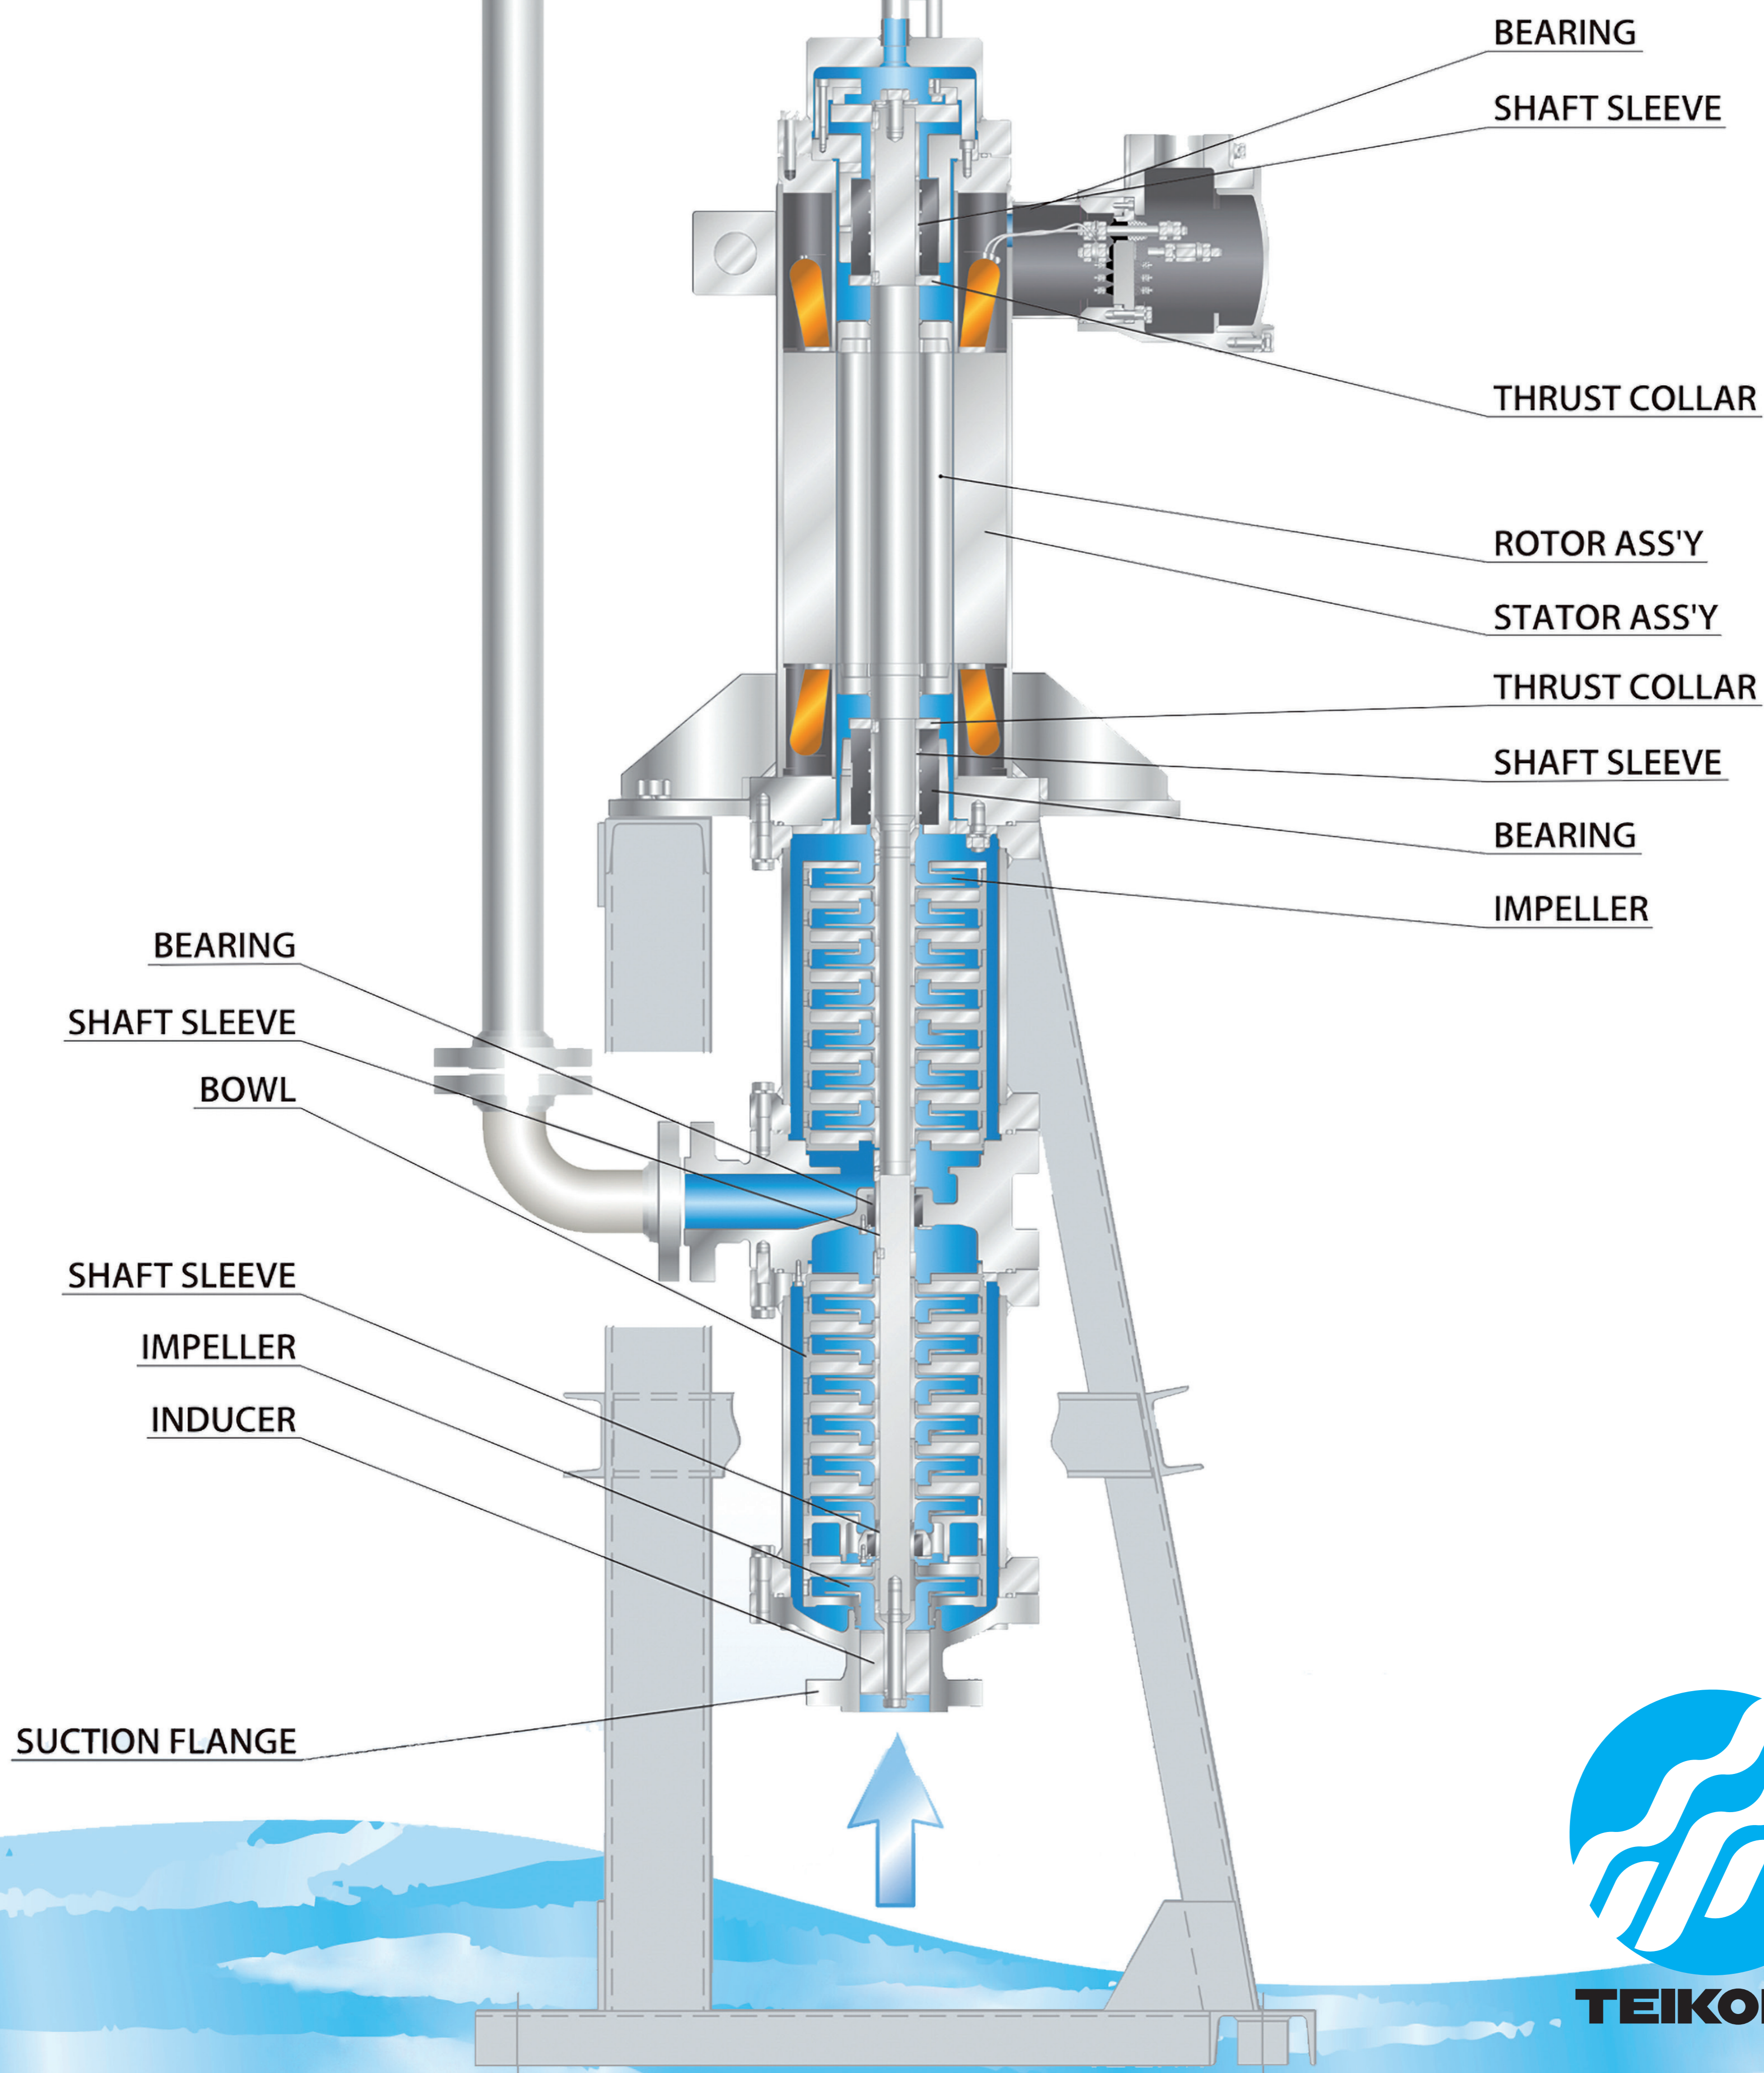

TEIKOKU

TYPE RV

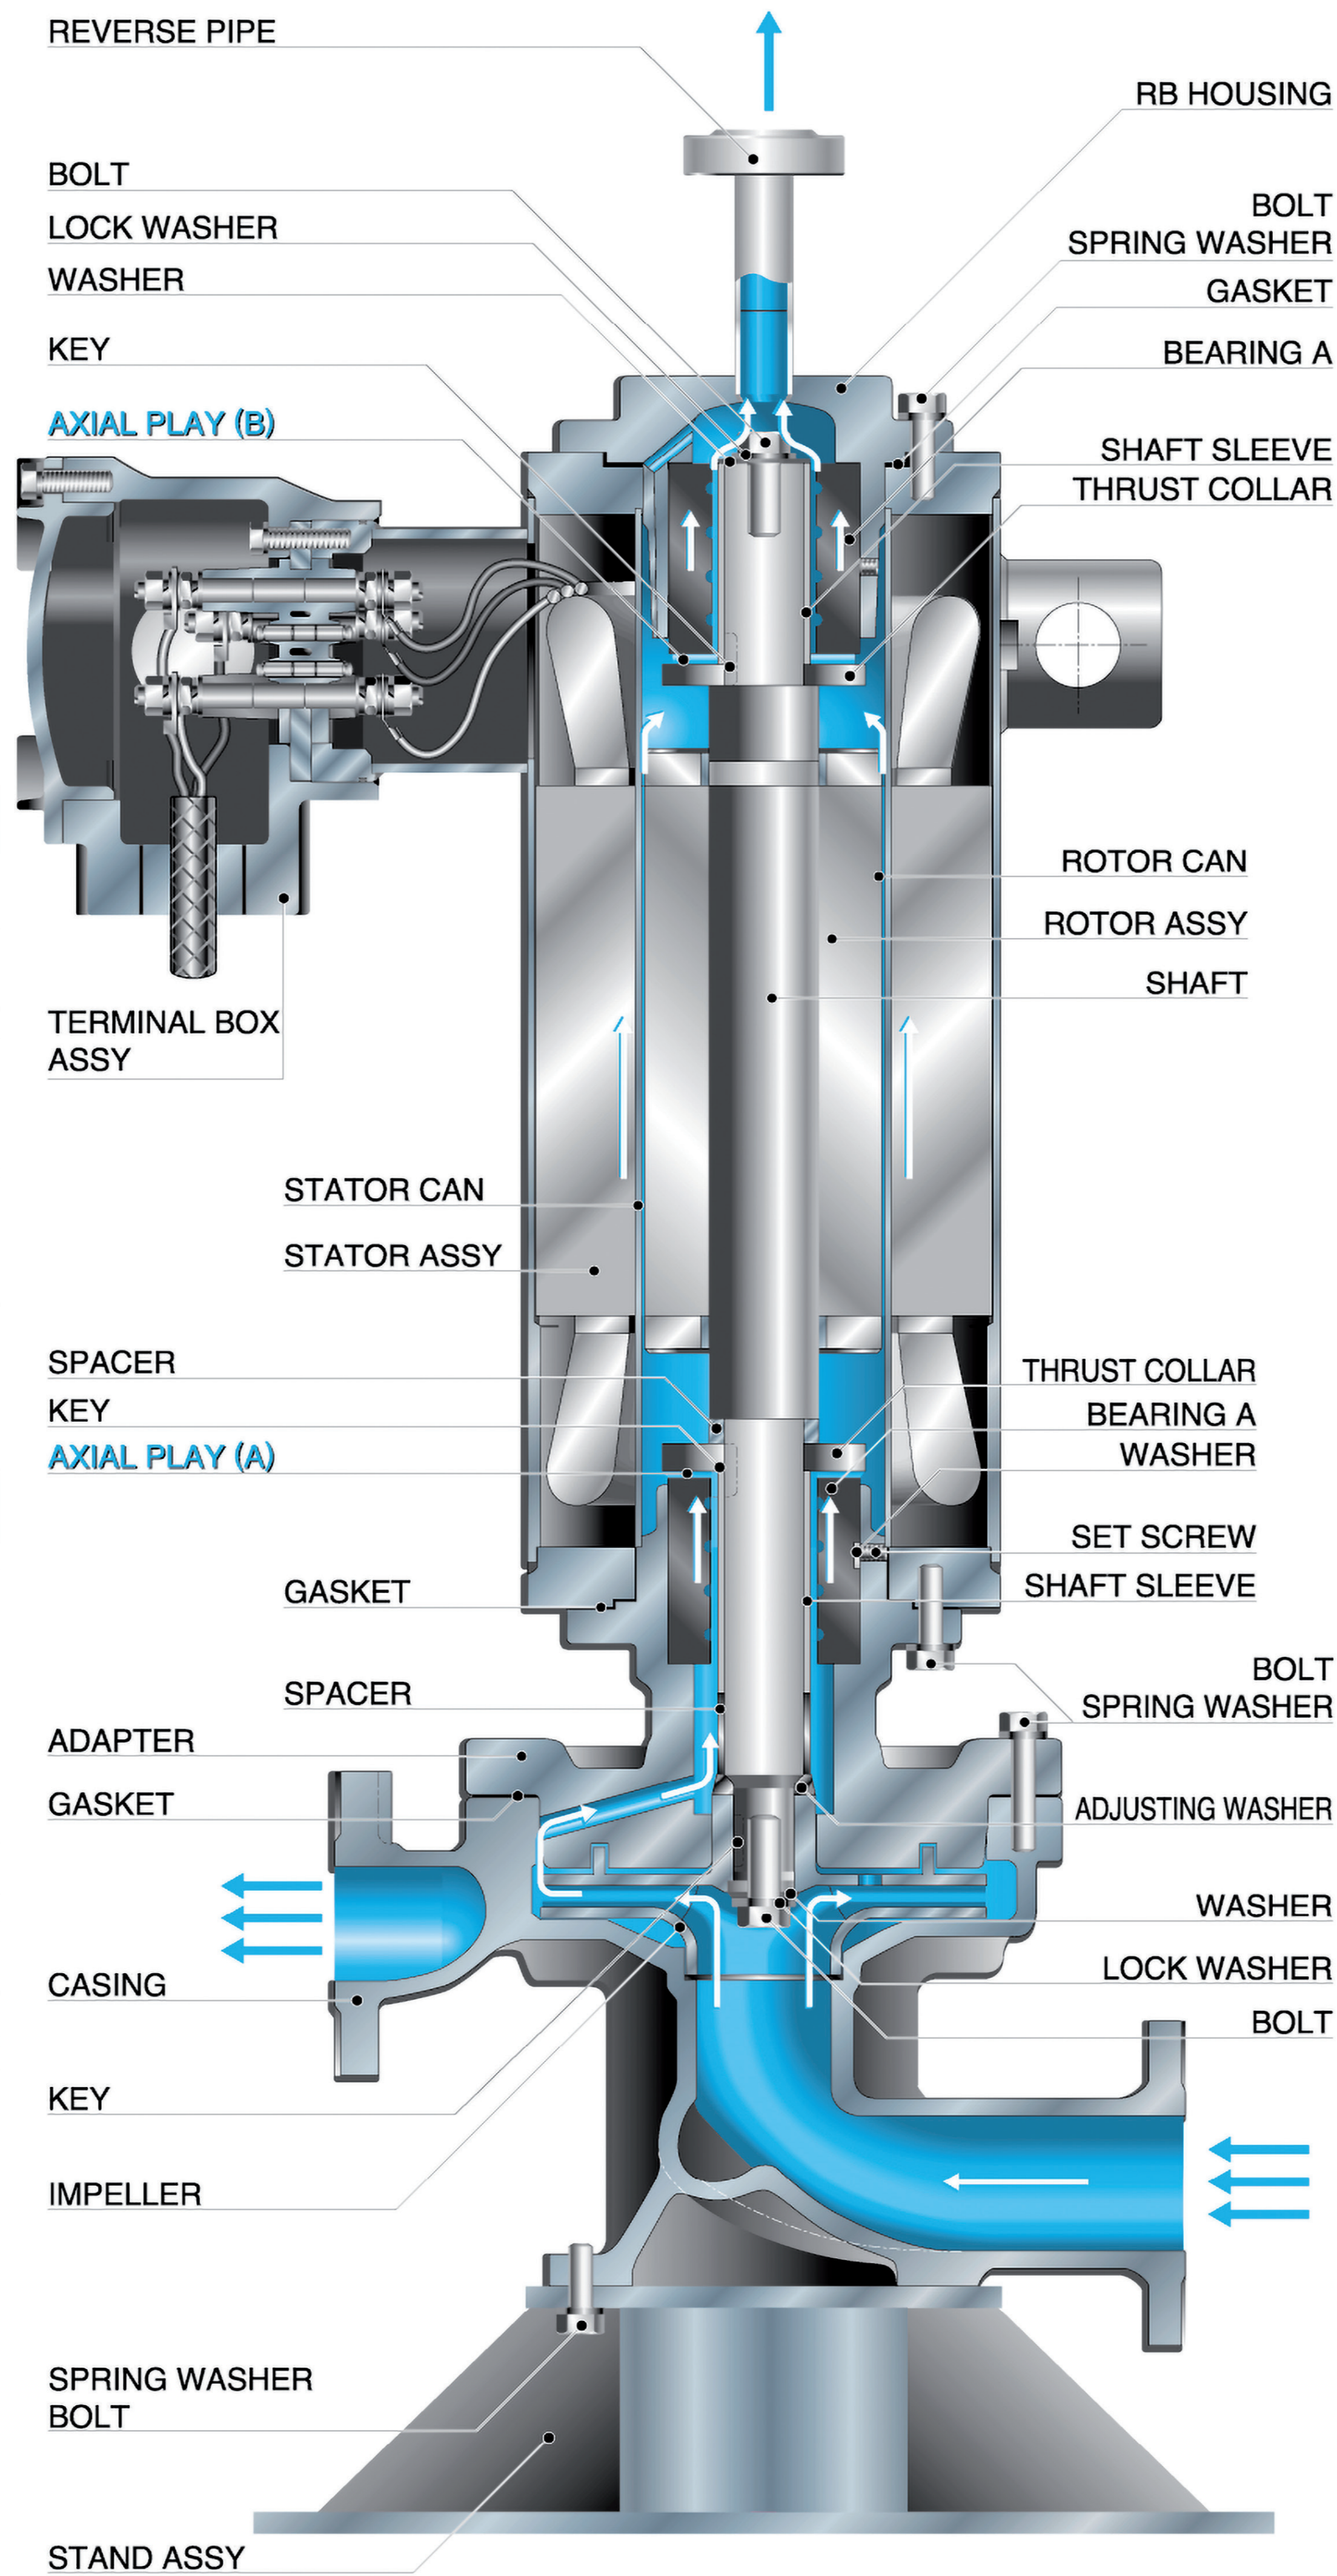

Axial play(A+B)


Standard Type

Motor Frame No.	Axial play(A+B)
110	0.7~1.9 mm (0.028~0.075 inches)
210	0.7~2.1 mm (0.028~0.083 inches)
310	0.7~2.1 mm (0.028~0.083 inches)
410,320	0.9~2.5 mm (0.035~0.098 inches)
510,420	1.1~2.9 mm (0.043~0.114 inches)
610,520	0.7~1.9 mm (0.047~0.118 inches)
710,620	1.4~3.4 mm (0.055~0.134 inches)


TBL Type

Motor Frame No.	Axial play(A+B)
110	1.5~1.9 mm (0.059~0.075 inches)
210	1.5~2.1 mm (0.059~0.083 inches)
310	1.5~2.1 mm (0.059~0.083 inches)
410,320	1.9~2.5 mm (0.074~0.098 inches)
510,420	1.8~2.9 mm (0.071~0.114 inches)
610,520	2.1~3.0 mm (0.083~0.118 inches)
710,620	2.5~3.4 mm (0.098~0.134 inches)

Standard Type

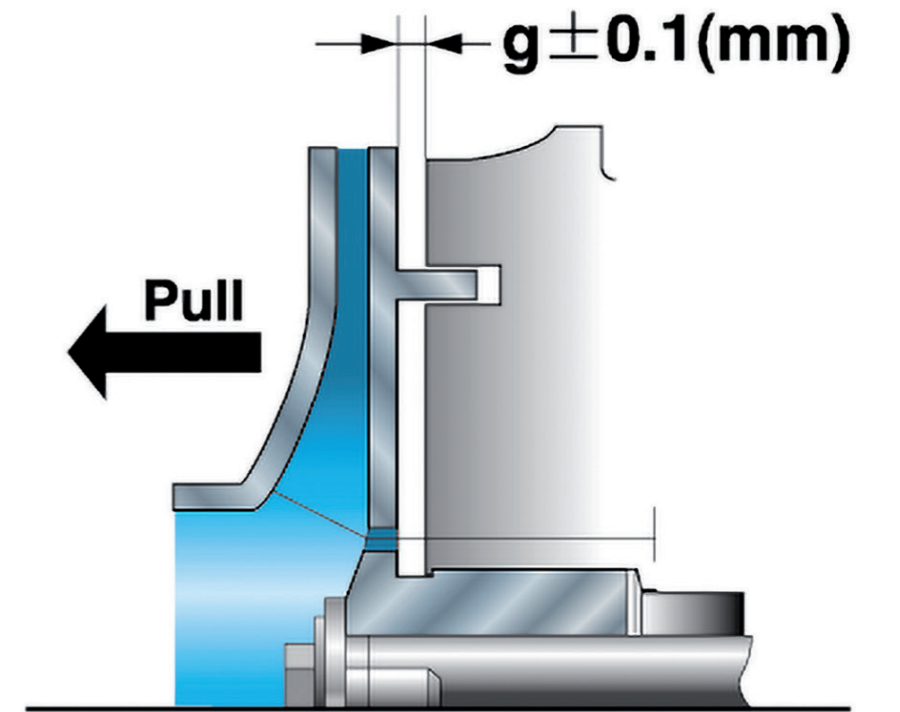

TBL Type

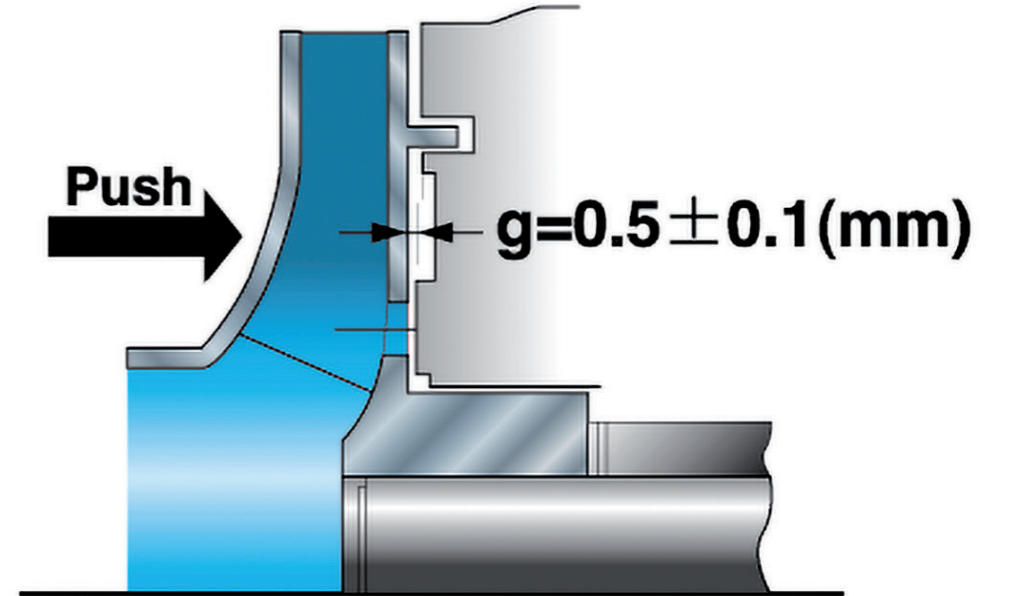

Standard Type

Adjusting Value of GAP "g"

Motor Frame No.	Impeller Size	"g" adjusted
110	R	4 mm(0.158 inches)
210	R,S	4 mm(0.158 inches)
	T	4.2mm(0.165 inches)
310	R,S	4 mm(0.158 inches)
	T	4.2mm(0.165 inches)
	U	4.7mm(0.185 inches)
410 320	R,S	4.2mm(0.165 inches)
	T	4.5mm(0.177 inches)
	U	5 mm(0.197 inches)
510 420	V	6 mm(0.236 inches)
	S	4.4mm(0.173 inches)
	T	4.6mm(0.181 inches)
610 520	U	5 mm(0.197 inches)
	V	6 mm(0.236 inches)
	S	4.4mm(0.173 inches)
710~ 620~	T	4.6mm(0.181 inches)
	U	5 mm(0.197 inches)
	V,W	6.4mm(0.252 inches)



TEIKOKU